



DATA SHEET:

HIGH RAISED ADJUSTABLE PAVING SUPPORT

Rev.:2
041001
D.S.:
BAS020

1. PRODUCT NAME:

GIGA and GIGA S

2. DESCRIPTION:

GIGA and GIGA S (Fig.1) are high load (400 kg/each), heavy duty adjustable support for high raised tile paving (up to 571mm height).

3. APPLICATIONS:

Suitable for horizontal and sloped flat roofs.
Best to convert roof decks areas in usable

- terraces
- balconies
- patios
- walkways
- parking

4. ADVANTAGES:

- light
- high impact resistant;
- resilient;
- easy to install;
- UV resistant
- economical;

5. INSTALLATION:

The following are general installation procedures.

A. Preparatory work:

Roof should be completed and cleaned from lose material before paving supports installation.

B. Fixation:

Support should be laid lose and positioned at each tile corner.

C. Consumption:

Quantity per sq.m. depends on tile size.

6. SIZE & PACKAGE:

See details in Tab. 1

7. TECHNICAL SPECS:

See Fig. 1, Tab. 1, Tab. 2

8. AVAILABILITY AND COSTS:

Standard support Series are indicated below.

Supports size exceeding the standard is available on demand.

Tab. 1 Adjustable Support Standard Series

<u>Adj.Height</u>	<u>Type</u>	<u>Q.ty/pckg</u>
35 - 50	GIGA	20
50 - 75	GIGA	20
75 - 20	GIGA	20
115 - 220	GIGA	20
121 - 211	GIGA S	20
211 - 301	GIGA S	20
301 - 391	GIGA S	20
391 - 481	GIGA S	20
481 - 571	GIGA S	20

Tab.2 Needed quantity / sq.m.

<u>Tile size</u>	<u>No. of supports/sq.m.</u>
30x30 cm	11 - 12 pcs
30x35 cm	9 - 10 pcs
30x40 cm	8 - 9 pcs
35x40 cm	7 - 8 pcs
40x40 cm	6 - 7 pcs
50x50 cm	4 - 5 pcs
60x60 cm	2 - 3 pcs

9. ACCESSORIES:

- upper head available also with 4-6-8-and 10mm tile spacers. Standard upper head has 2,2mm tile spacers.

- slope regulator rings for 1%-2%-3% slope.

S.R. rings can be piled up one on top of the other to reach 6% and over, if necessary.

- anti-shock rubber levelling rings



All data mentioned are for reference pur pose only and are not intended as a warranty or guarantee.

PLYDEX

PLYDEX srl
17, Via della Tecnica
36031 Dueville VI - Italy

Tel. (+39) 0444 594343 Fax 594358
info@plydex.it

Fig.1

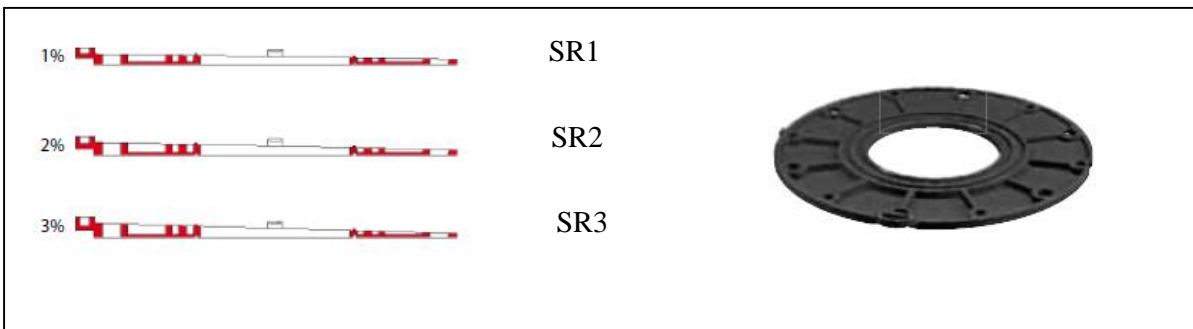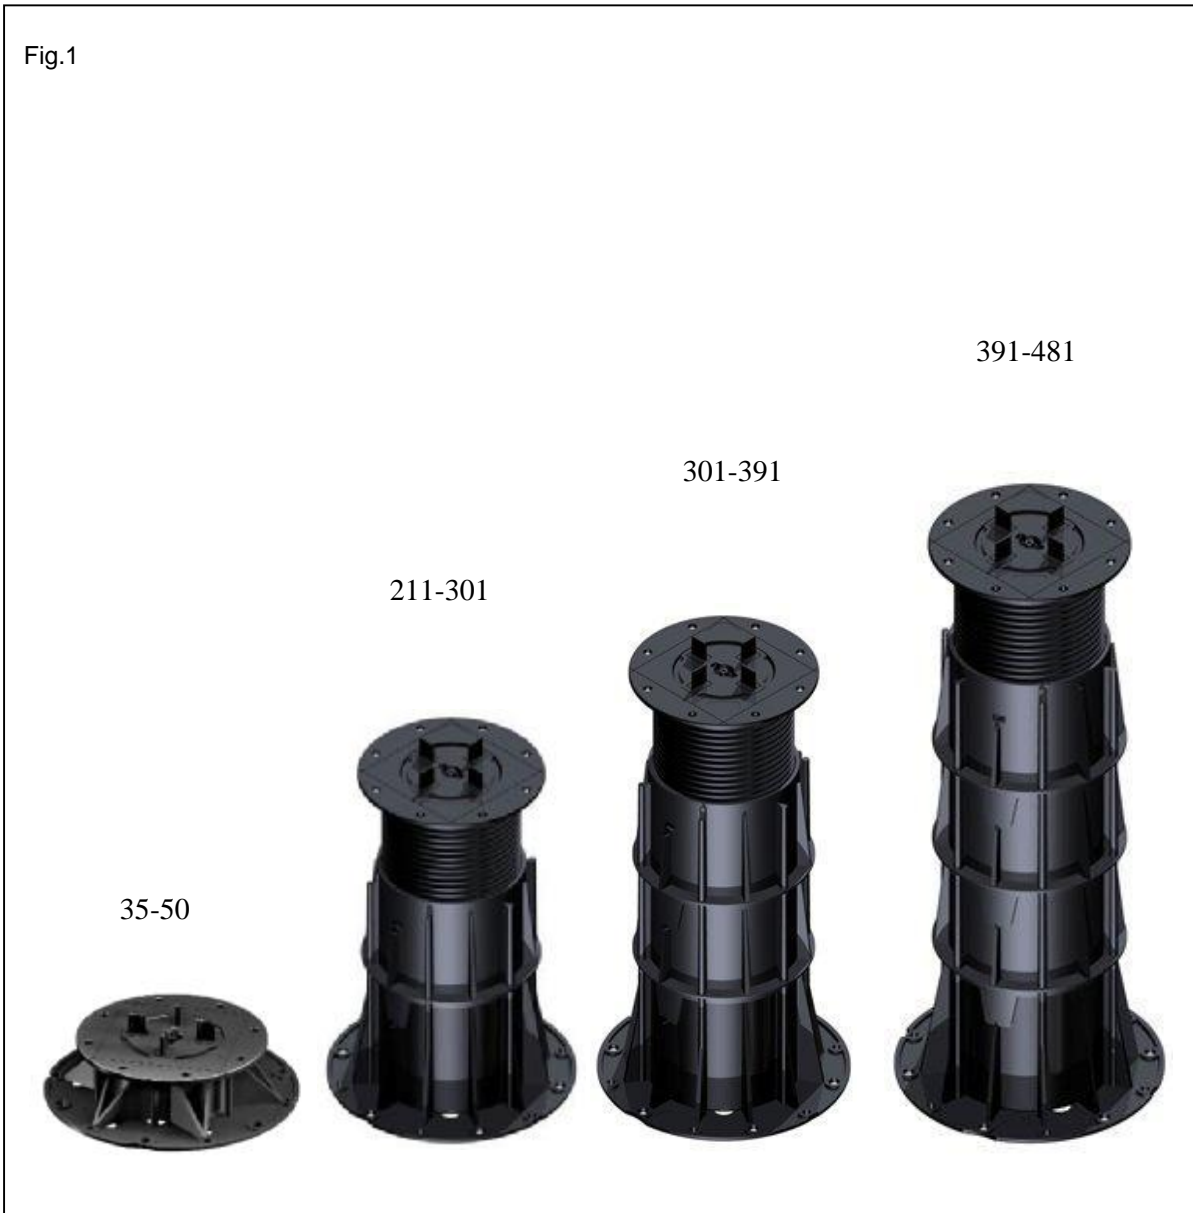

All data mentioned are for reference pur pose only and are not intended as a warranty or guarantee.

PLYDEX

PLYDEX srl
17, Via della Tecnica
36031 Dueville VI - Italy

Tel. (+39) 0444 594343 Fax 594358
info@plydex.it

GEOTEXTILES, GEOMEMBRANES, DRAINAGE MEDIA, ANTIEROSION MATS, CONCRETE SPECIALITIES.